

- ❖ One system capable of making rectangular, square, and round containers
- ❖ Control interface controls all process functions
- ❖ All functions are adjustable while the machine is running
- ❖ Capable of producing containers and lids on the same machine
- ❖ Substantial savings in raw material when compared to traditional IML-Injection



The F25/5 IML-T is a fully electrical, automatic thermoforming machine with forming and cutting operations in one station.

Mould closing and cutting operations are performed through a servo actuated mechanical toggle system. The whole machine, including discharge devices, is controlled by the control interface.

Using the OMV Operator Interface with LCD screen, all process functions are controlled with a Siemens PLC. All functions are adjustable while the machine is running. Machine cycle speeds are adjustable and continuously changeable while the machine is working. Press has two different strokes, depending upon the required forming depth.

OMV Technologies

www.omvtechnologies.com
info@omvtechnologies.com

OMV Technologies USA, LLC
 8771 SE Bridge Rd. #314
 Hobe Sound, FL 33455
 Phone: (1-833) 625 7872 Fax:
 (1-888) 507 0791

OMV Machinery srl - Italy Via
 Lussemburgo, 24
 37135 Verona (VR) - Italy
 Phone: +39 045 96 40 400

F25/5 – The face former




**The IML thermoformer
for containers, cups, and
lids**



One system for many product forms

- ❖ Safe and Operator-friendly equipment
- ❖ carbon-fibre moving parts for speed and energy savings
- ❖ Electrostatic charge system for TIML

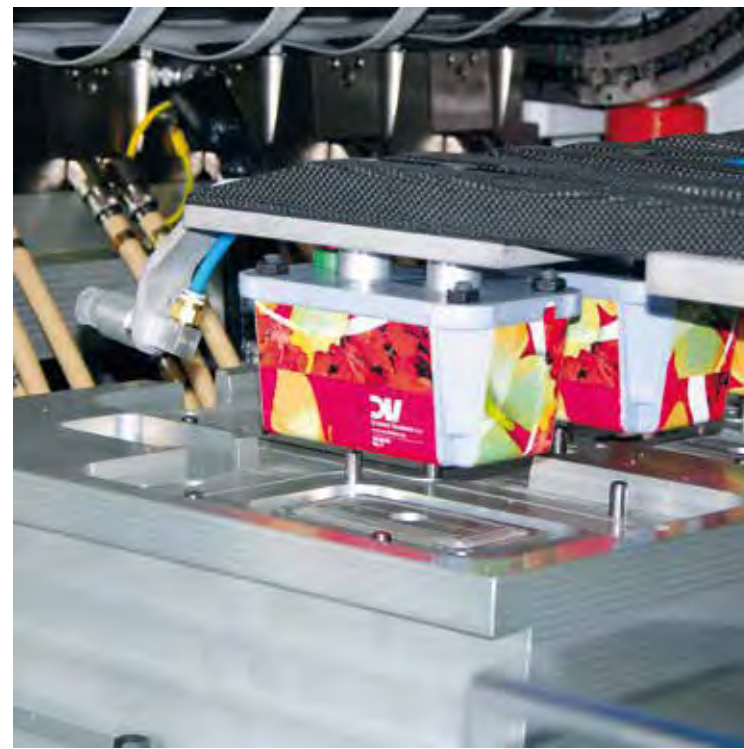

Technical Specifications of F 25/5 Thermoformer - IML Version		
Materials	PP – PS	
Max. forming area	mm	850 x 250
Max. sheet width	mm	910
Sheet thickness	mm	0,2 - 2,2
Max. forming depth	mm	110
Max. positive forming	mm	15
Forming with compressed air	bar	6
Dry Cycles	strokes/min	40
Oven size	mm	1.280 x 1.000
Mould closing force/Cutting Force	daN	16.000
Max. cutting length	mm	4.500
Max. air consumption	NI/min.	10.000
Max. cooling required (at 8°-10°C)	kcal/h	28.000
Max. vacuum consumption (optional)	m ³ /h	100
External dimensions	mm	7.500 x 6.200 x 2.630/h
Weight	kg	12.000
Total installed motor power	kW	87

The Product Stacking in the F25/5 IML is different from the standard machine, as the formed products are unloaded onto a conveyor carrying them to the stacking system. Here, the products are blown into the stacker channels, which arranges them into stacks. After reaching the preset number of products a gate automatically separates the counted stacks.

Heating is accomplished by means of an infrared sandwich oven with independently electronically controlled ceramic heaters. Lubrication performed at regular time intervals by an automatic unit pumps lubricating oil into all moving parts of the machine.

A Standard 900 mm reel unwinder with hydraulic lifting device is synchronized with the machine cycle. skeletal web winder is attached to the machine frame and synchronized with the machine cycle.

T

IML – Robot Handling System

The F25/5 thermoforming machine is equipped with a totally independent “Label-Robot-Handling-System”, which is installed on a mobile frame. This facilitates tool changing and offers maximum accessibility to the forming station.

The “Label-Robot-Handling System” can execute the following functions:

- Labels supplied in change magazine
- Label separating
- Label forming and pre-centering in the label forming device
- Inserting the labels into the cavities of the thermoforming mould
- Labelled products unloading on a conveyor belt
- Reject possibility for bad and start-up parts

The above described functions are carried out in one phase of operation. Therefore, the system can achieve considerable time savings allowing for the increased speed of the “IML thermoforming operation”. The labelled products are unloaded on a conveyor belt, which is located between the forming station and the upper heating oven.

The conveyor belt transports the labeled products to the OMV standard stacking and counting unit, which is placed on the side of the thermoforming station. Only one operator is necessary for running the machine and packing the finished products. With the “IML Robot Handling System”, rectangular, square or round containers can be labeled in connection with the single row thermoforming mould of the F25-IML machine.

The above “IML Robot Handling System” can also be designed to accept all shapes of lids.

Selection of most widely used products – characteristics

	Round yogurt cup	75 mm Ø	5 g	11	11.800*
	Round container	95 mm Ø	12-14 g	8	7.680*
	Euro TUB 500	142 x 92 mm	12 g	7	6.300*
	Euro TUB 250	124 x 84 mm	7 g	8	7.680*
	Lid	148 x 98 mm	5 g	7	7.560*

* Expected Speed: based on the experience of OMV but it may change as result of variables such as: raw material, product weight, product design. Exact speed will be confirmed after receiving final product drawings and specs from the customer.